

MAXX 

Mess- und Probenahmetechnik GmbH

Portable
Samplers



P6 L

Model P6 Vacuum Dosing System

Technical data at a glance

| | |
|-----------------------------|--|
| Housing: | Made of ABS and PP Doublewalled, insulated base |
| Control: | Microprocessor control, foil keypad, back lit display Option: with PC software or LAN/GPRS/WEB communication (2 year ring memory FIFO at 1 min interval) |
| Programming: | 12 freely programmable user programs, user-friendly software |
| Interface: | MiniUSB, optional: Ethernet RJ45, SDI-12 |
| Signal inputs: | 2 x analog: 0/4–20 mA, working resistance 500 Ohm 8 x digital (Flow, Event, 1 x free programmable) Impulse length 50 ms |
| Signal outputs: | 8 x digital, one of them as collective malfunction message |
| Dosing system: | Vacuum: Plastic 15-320 ml, optional glass 15-290 ml |
| Suction height: | 6,5 m (at 1000 hPa), higher possible on request |
| Sampling modes: | Time (CT, CV), Flow (VT, CV) or (CT, VV) (Flow modes are controlled by an external flowmeter signal) Event and manual sampling |
| Bottle variants: | P6 L PE: 24 x 1 l/1 x 10 l/4 x 4 l/8 x 2 l Glass: 24 x 350 ml/12 x 1 l/8 x 2 l P6 Mini Maxx: PE: 1 x 10 l; glass: 1 x 5 l |
| Overall dimensions: | P6 L: 500 x 805 mm (diam. x h) P6 Mini Maxx: 400 x 605 mm (diam. x h) |
| Weight: | P6 L approx. 13 kg (without battery) P6 MINI MAXX approx. 9 kg (without battery) |
| Power supply: | 12 V/9 Ah battery with charger 2A IP65 or power supply 7A IP65 |
| Ambient temperature: | 0° to +50° C |
| Sample temperature: | 0° to +40° C |
| Standards: | CE, sampling according to ISO 5667-10, EN 16479 |



P6 MINI MAXX



P6 L

Unique combination of design and technology

Your advantages:

- > Direct connection via USB of an external multi-parameter portable meter pH/Cond/Temp [Option]
- > Highly accurate sample volume
- > Clear operating structure and simple programming
- > LAN/GPRS/Web communication [Option]
- > Easy cleaning
- > Modern and ergonomic design
- > Long battery run-time thanks to »sleep mode«
- > 2nd dosing tube for changing the sample volume
- > Pumping speed > 0,5 ms at suction height up to 5 m (at 1000 hPa)



P6 L MAXX with suspension harness (optional)



P6 L with 24 x 1 L bottle variant



Model P6 Peristaltic Pump

Technical data at a glance

| | |
|-----------------------------|--|
| Housing: | Made of ABS and PP Doublewalled, insulated lower part |
| Control: | Microprocessor control, foil keypad, back lit display Option: with PC software or LAN/GPRS/WEB communication (2 year ring memory FIFO at 1 min interval) |
| Programming: | 12 freely programmable programs, user-friendly software |
| Interface: | MiniUSB, optional: Ethernet RJ45, SDI-12 |
| Signal inputs: | 2 x analog: 0/4–20 mA , working resistance 500 Ohm 8 x digital (Flow, Event, 1 x free programmable) Impulse length 50 ms |
| Signal outputs: | 8 x digital, one of them as collective malfunction message |
| Dosing system: | Peristaltic pump 10–10.000 ml |
| Suction height: | max. 8,5 m (at 1000 hPa) |
| Sampling modes: | Time (CT, CV), Flow (VT, CV) or (CT, VV), variable flow (Flow modes are controlled by an external flowmeter signal) Event and manual sampling |
| Bottle variants: | P6 L PE: 24 x 1 l/1 x 10 l/4 x 4 l/8 x 2 l Glass: 24 x 350 ml/12 x 950 ml/8 x 2 l P6 Mini Maxx: PE: 1 x 10 l; glass: 1 x 5 l |
| Overall dimensions: | P6 L: 500 x 805 mm (diam. x h) P6 Mini Maxx: 400 x 605 mm (diam. x h) |
| Weight: | P6 L approx. 13 kg (without battery) P6 MINI MAXX approx. 9 kg (without battery) |
| Power supply: | 12 V/9 Ah battery with charger 2A IP65 or power supply 7A IP65 |
| Ambient temperature: | 0° to +50° C |
| Sample temperature: | 0° to +40° C |
| Standards: | CE, sampling according to ISO 5667-10, EN 16479 |



P6 MINI MAXX



P6 L

Unique combination of design and technology

Your advantages:

- > Intelligent sensor replacement function »MAXX mode«
- > Direct connection via USB of an external multi-parameter portable meter pH/Cond/Temp (Option)
- > Innovative measuring device for volume determination
- > Minimal effort für calibration
- > Highly accurate sample volume
- > Clear operating structure and simple programming
- > LAN/GPRS/Web communication (Option)
- > Easy cleaning
- > Modern and ergonomic design
- > Long battery run-time thanks to »sleep mode«
- > Integrated pump replacement tube
- > Pumping speed > 0,5 ms at suction height up to 5 m (at 1000 hPa)



P6 MINI MAXX with composite container



P6 MINI MAXX with suspension harness



Model TP5 C with active cooling



Technical data at a glance

| | |
|------------------------------|--|
| Housing: | PE/PC (GF10) Doublewalled, insulated lower part |
| Thermostatic control: | compressor cooling (12 V/115 V/230 V) |
| Control: | Microprocessor control, foil keypad, back lit display Option: with PC software or LAN/GPRS/Web communication (2 year ring memory FIFO at 1 min interval) |
| Programming: | 12 freely programmable programs, user-friendly software |
| Interface: | MiniUSB, optional: Ethernet RJ45, SDI-12 |
| Signal inputs: | 2 x analogue: 0/4–20 mA, working resistance 500 Ohm 8 x digital (Flow, Event, 1 x free programmable) Impulse length 50 ms |
| Signal outputs: | 8 digital outputs, 1x of them as collective malfunction message |
| Sampling method: | Vacuum 20–350 ml |
| Suction height: | 6,5 m (at 1000 hPa) |
| Pumping speed: | > 0,5 ms at suction height up to 5 m (at 1000 hPa) |
| Suction hose: | PVC, L = 5 m, ID = 10 mm (max. hose length 20 m) |
| Sampling modes: | Time, flow, event-related and manual sample Option: variable flow-proportional sampling |
| Bottle variants: | 24 x 1 l PE (standard version), 24 x 1 l glass, 1 x 10 l; 1 x 25 l, 2 x 13 l; 4 x 5 l; 16 x 1 l PE incl. freezer packs, |
| Overall dimensions: | 1.028 x 550 x 468 mm [hwxwd]/Insulating box active |
| Weight: | approx. 40 kg; Isobox with active cooling (24 x 1 l) |
| Power supply: | Sampler 12 V/10 Ah battery/Charger 2A IP65 or power supply 7A IP65 Active box 230/115 V–50/60 Hz 12 V battery |
| Ambient temperature: | 0° to +45° C |
| Sample temperature: | 0° to +40° C |
| Standards: | CE, sampling according to ISO 5667-10, EN 16479 |



T5 C – Compact device with integrated distributor insulating box with active cooling

Your advantages:

- > Direct connection via USB of an external multi-parameter portable meter pH/Cond/Temp (Option)
- > with vacuum system
- > Highly accurate sample volume
- > Transport trolley (Option)
- > Clear operating structure and simple programming
- > LAN/GPRS/Web communication (Option)
- > Easy cleaning
- > Modern and ergonomic design
- > Long battery run-time thanks to »sleep mode«
- > 2nd dosing tube for changing the sample volume
- > Active cooling system with compressor 12/115/230 V



Active cooling 12/115/230 V
variant 24 x 11



Charger 2A IP65 or power
supply 7A IP65




Model TP5 C with passive cooling



Technical data at a glance

| | |
|------------------------------|--|
| Housing: | PE/PC (GF10) Doublewalled, insulated lower part |
| Thermostatic control: | compressor cooling (12 V/115 V/230 V) |
| Control: | Microprocessor control, foil keypad, back lit display Option: with PC software or LAN/GPRS/WEB communication (2 year ring memory FIFO at 1 min interval) |
| Programming: | 12 freely programmable programs, user-friendly software |
| Interface: | MiniUSB, optional: Ethernet RJ45, SDI-12 |
| Signal inputs: | 2 x analog: 0/4–20 mA, working resistance 500 Ohm 8 x digital (Flow, Event, 1 x free programmable) Impulse length 50 ms |
| Signal outputs: | 8 digital outputs, 1x of them as collective malfunction message |
| Sampling method: | Vacuum: Plastic 15-320 ml, optional glass 15-290 ml |
| Suction height: | 6,5 m (at 1000 hPa) |
| Pumping speed: | > 0,5 ms at suction height up to 5 m (at 1000 hPa); |
| Suction hose: | PVC, L = 5 m, ID = 10 mm (max. hose length 20 m) |
| Sampling modes: | Time, flow, event-related and manual sample, |
| Bottle variants: | 24 x 1 l PE (standard version), 24 x 1 l glass, 1 x 10 l; 1 x 25 l, 2 x 13 l; 4 x 5 l; 16 x 1 l PE incl. freezer packs |
| Overall dimensions: | 787 x 510 x 468 mm (hwxwd)/Insulating box passive |
| Weight: | approx. 25 kg: Isobox with passive cooling (24 x 1 l) |
| Power supply: | sampler 12 V/10 Ah battery/Charger 2A IP65 or power supply 7A IP 65 |
| Ambient temperature: | 0° to +50° C |
| Sample temperature: | 0° to +40° C |
| Standards: | CE, sampling according to ISO 5667-10, EN 16479 |



T5 C – Compact device with integrated distributor insulating box with passive cooling

Your advantages:

- > Direct connection via USB of an external multi-parameter portable meter pH/Cond/Temp (Option)
- > With vacuum system
- > Highly accurate sample volume
- > Transport trolley (Option)
- > Clear operating structure and simple programming
- > LAN/GPRS/Web communication (Option)
- > Easy cleaning
- > Modern and ergonomic design
- > Long battery run-time thanks to »sleep mode«
- > 2nd dosing tube for changing the sample volume
- > Sample cooling with ice packs/dry ice



Suspension bar for use in sewers
with suspension harness



Dosing system Vakuum



Model TP5 P



Technical data at a glance

| | |
|------------------------------|--|
| Housing: | PS/PC (GF10)/PE Doublewalled, insulated lower part |
| Thermostatic control: | compressor cooling (12 V/115 V/230 V) |
| Control: | Microprocessor control, foil keypad, back lit display Option: with PC software or LAN/GPRS/WEB communication (2 year ring memory FIFO at 1 min interval) |
| Programming: | 12 freely programmable programs, user-friendly software |
| Interface: | MiniUSB, optional: Ethernet RJ45, SDI-12 |
| Signal inputs: | 2 x analogue: 0/4–20 mA, working resistance 500 Ohm 8 x digital (Flow, Event, 1 x free programmable) Impulse length 50 ms |
| Signal outputs: | 8 digital outputs, 1x of them as collective malfunction message |
| Sampling method: | Vacuun: Plastic 15-320 ml, optional glass 15-290 ml |
| Suction height: | 6,5 m (at 1000 hPa), higher possible on request |
| Pumping speed: | > 0,5 ms at suction height up to 5 m (at 1000 hPa) |
| Suction hose: | PVC, L = 5 m, ID = 10 mm (max. hose length 20 m) |
| Sampling modes: | Time, Flow, Event-related and manual sample |
| Bottle variants: | 1 x 10 l; 1 x 25 l, |
| Overall dimensions: | Device 442 x 452 x 222 mm (HxWxD) Isobox passive: 534 x 510 x 430 mm (HxWxD) Isobox active: 775 x 550 x 468 mm (HxWxD) |
| Weight: | Isobox passive approx. 11 kg, isobox active approx. 25 kg |
| Power supply: | sampler 12 V/10 Ah battery/Charger 2A IP65 or power supply 7A IP65 Active cooling 230/115 V, 50/60 Hz/12 V Accu |
| Ambient temperature: | 0° to +50° C |
| Sample temperature: | 0° to +40° C |
| Standards: | CE, sampling according to ISO 5667-10, EN 16479 |



Compact device which can be combined with any composite container or an insulating box with active or passive cooling

Your advantages:

- > Direct connection via USB of an external multi-parameter portable meter pH/Cond/Temp (Option)
- > Highly accurate sample volume
- > Transport trolley (Option)
- > Clear operating structure and simple programming
- > LAN/GPRS/WEB communication (Option)
- > Easy cleaning
- > Modern and ergonomic design
- > Long battery run-time thanks to »sleep mode«
- > Sample cooling with ice packs/dry ice



TP 5 P with strap on active insulating box




Dosing unit with bayonet fixing



Model TP5 W

Wall-mounted device

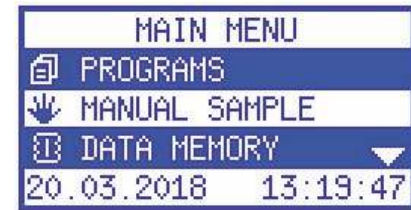

Technical data at a glance

| | |
|------------------------------|---|
| Housing: | PS/PC (GF10) |
| Thermostatic control: | no; option: refrigerator |
| Control: | Microprocessor control, foil keypad, back lit display Option: with PC software or LAN/GPRS/WeEB communication (2 year ring memory FIFO at 1 min interval) |
| Programming: | 12 freely programmable programs, user-friendly software |
| Interface: | MiniUSB, optional: Ethernet RJ45, SDI-12 |
| Signal inputs: | 2 x analogue: 0/4–20 mA, working resistance 500 Ohm 8 x digital (flow, event, 1 inputs can be programmed freely) Impulse length 50 ms |
| Signal outputs: | 8 digital outputs, 1x of them as collective malfunction message |
| Sampling method: | Vacuum: Plastic 15-320 ml, optional glass 15-290 ml |
| Suction height: | 6,5 m (at 1000 hPa), higher possible on request |
| Pumping speed: | > 0,5 ms at suction height up to 5 m (at 1000 hPa); |
| Suction hose: | PVC, L = 5 m, ID = 10 mm (max. hose length 20 m) |
| Sampling modes: | Time, Flow, Event-related and manual sample, |
| Bottle variants: | composite container (Option) |
| Overall dimensions: | 362 x 442 x 222 mm (hwxwd) |
| Weight: | approx. 10 kg |
| Power supply: | 230 V/115 V/AC |
| Ambient temperature: | 0° to +50° C |
| Sample temperature: | 0° to +40° C |
| Standards: | CE, sampling according to ISO 5667-10, EN 16479 |

Wall-mounted device which can be combined with any composite container or refrigerator

Your advantages:

- > New, direct connection via USB of an external multi-parameter portable meter pH/Cond/Temp (Option)
- > Flexible application and combination possibilities
- > Highly accurate sample volume
- > Clear operating structure and simple programming
- > LAN/GPRS/WEB communication (Option)
- > Easy cleaning
- > Modern and ergonomic design



TP5 W in combination with optional fridge 1 x 25 L



Non-contact, capacitive filling level-sensor (Option)



An excerpt from our big
range of accessories







MAXX[®]

Mess- und Probenahmetechnik GmbH

MAXX GmbH
Hechinger Straße 41
72414 Rangendingen

Phone +49 (0)7471 98481 0
Fax +49 (0)7471 9848144

www.maxx-gmbh.com
info@maxx-gmbh.com



Any questions?



Please contact us:
info@maxx-gmbh.com

Technical subject to changes.